

# Sliding gate Arion 6 m E

## **Specifications**


lear width (m)

Dimensions Height (mm) 2000

Dimensions Width (mm) 8900

Power supply 230V (250W Sliding direction Right - Left Weight (Kg) 920.00

Disclaimer. There are no rights to be derived from the technical specification. You shoul always consider up to 10% tolerance deviations. Heras herewith complies with NEN-EN 10305-3 @ Heras.

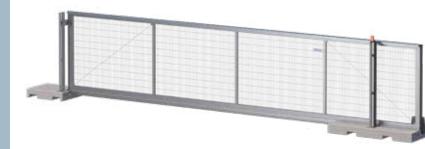

### Arion skydeport kombinerer optimal fleksibilitet og sikkerhed

#### Installation is quick and easy

The Arion sliding gate is very easy and quick to install thanks to its prefab concrete footing. The design of the sliding gate integrates perfectly into temporary and semi-permanent fencing lines. A smart design ensures that the gate runs smoothly and is easy to install and move.

#### Seamless connection to fence line

The gate is delivered fully assembled, including foundation. The Anti-Climb welded mesh makes climbing over the gate near impossible.

- · Gate wing with Anti-Climb welded mesh
- Powerful Cardin motor
- Low-maintenance
- Including flashing light, infrared and remote control

### Clear width of 6 m or 7 m

The clear passage widths are 6 or 7 metres. Both versions are available with manual or electronic controls. Furthermore, safety frames and photocells ensure that the gate does not cause damage to vehicles or injury to people.

